

technicalinformation

Symbols



Wall



Glazed Porcelain



Floor



Color Body



Glossy



Full Polished



Crystal



Lappato



Matt




Semi Matt



Steel Glossy


Shade Variation

According to the changes in the prints of pattern due to the design of our products, the color tone changes indicated on the labels of the boxes are made as follows. When it is opened 1 box from the product you purchased, changes in the patterns and views between the tiles found in the box are varied with respect to the design of the products.




V1 Uniform Appearance

Color and texture difference between the tiles from the same lot is very low which cannot be seen as a result of the nature of the material.



V2 Slight Variation

There are clear differences in surface texture and printing patterns among the tiles having similar colors.



V3 Moderate Variation


Main colors in one single tile can be found in other tiles. However color intensity shows differences between tiles. This is generally used in rustic tiles.



V4 Substantial Variation


Color differences can be observed from one tile to another. Thus, color of one tile can be different from another one. However, a harmony is observed between colors. These kinds of products can be found in the boxes in a random order. This is a design approach which is generally used in rustic tiles. Color and texture variation can be controlled in our facilities. This is a parameter, and it is developed in the stage of product development as a requirement of market demands and design.

Box Label New Version

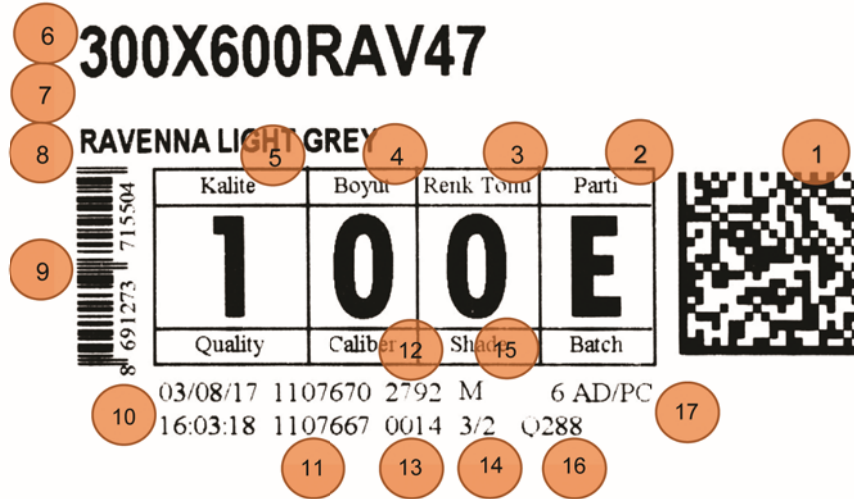


No	Definition
1	Barcode.
2	Production batch number. There may be slight difference between production parties. Tiles with different batch numbers shall not be applied in the same area!!!
3	Shade Codes: (0) Center (+1) Dark (+2) Darker (-1) Light (-2) Lighter Tiles with different shade codes shall not be applied in the same area!!!
4	Caliber Code. Tiles with different caliber codes shall not be applied in the same area!!!
5	Quality.
6	Product Code.
7	Product Definition (Turkish).
8	Product Definition (English).
9	EAN 13 Code.
10	Production Date.
11	Work order numbers. It is used to provide production traceability.
12	Packing Details.
13	Production Operator Code.
14	Production Department Code.
15	Packing Type: (Manual/Automatic)
16	Quantity on Pallet.
17	Quantity in Box.




Application Techniques



Herringbone Laying



Staggered Laying (Max 15% - % 20)

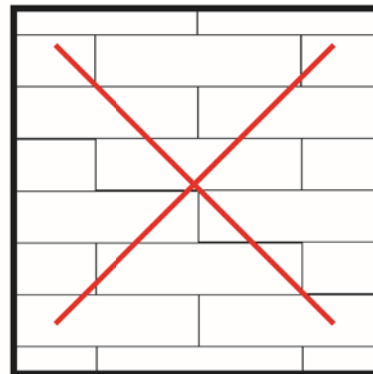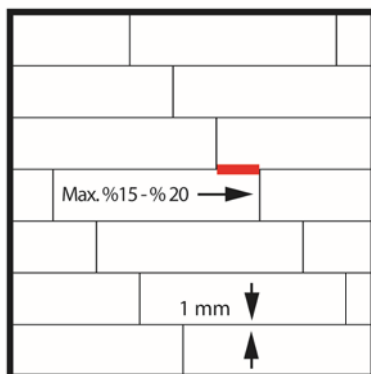

Staggered Laying (Max 50%)
Half Offset Laying Is Not Recommended

Dust Pressed Ceramic Wall Tiles With High Water Absorbtion

TECHNICAL CHARACTERISTIC	TS EN-14411Annex L Group BIII VALUES	EGE SERAMİK VALUE	TEST STANDARD
Length and width	$\pm 0,5\%$ I $\leq 12\text{cm}$	$\pm 0,5\%$ I $\leq 12\text{cm}$	ISO 10545-2
	$\pm 0,3\%$ I $> 12\text{cm}$	$\pm 0,3\%$ I $> 12\text{cm}$	
Thickness	As indicated by the manufacturer ($\pm 10\%$)	$\pm 10\%$	ISO 10545-2
Rectangularity	$\pm 0,50\%$	$\pm 0,20\%$	ISO 10545-2
Straightness of sides	$\pm 0,30\%$	$\pm 0,15\%$	ISO 10545-2
Center Curvature	$+ 0,50\%$ / - $0,30\%$	S $\leq 400\text{ cm}^2 + 0,25\%$ / - $0,10\%$ S $> 400\text{-}1000\text{ cm}^2 + 0,35\%$ / - $0,10\%$ S $\geq 1000\text{ cm}^2 + 0,35\%$ / - $0,10\%$	ISO 10545-2
Edge Curvature	$+ 0,50\%$ / - $0,30\%$	S $\leq 400\text{ cm}^2 + 0,25\%$ / - $0,10\%$ S $> 400\text{-}1000\text{ cm}^2 + 0,35\%$ / - $0,10\%$ S $\geq 1000\text{ cm}^2 + 0,35\%$ / - $0,10\%$	ISO 10545-2
Warpage	$\pm 0,50\%$	$\pm 0,25\%$	ISO 10545-2
Surface Quality	A minimum of 95 % of the tiles shall be free from visible defects that would impair the appearance of a major area of tiles		ISO 10545-2
Water Absorption	Av. $> 10\%$	Av. $> 10\%$	ISO 10545-3
Modulus of Rupture	Thickness $\geq 7,5\text{ mm}$ min 12 N/mm ² Thickness $< 7,5\text{ mm}$ min 15 N/mm ²	Thickness $\geq 7,5\text{ mm}$ min 12 N/mm ² Thickness $< 7,5\text{ mm}$ min 15 N/mm ²	ISO 10545-4
Breaking Strength	Thickness $\geq 7,5\text{ mm}$ 600 N Thickness $< 7,5\text{ mm}$ 200 N	Thickness $\geq 7,5\text{ mm}$ 600 N Thickness $< 7,5\text{ mm}$ 200 N	ISO 10545-4
Coefficient of linear thermal expansion	Test method available	Test method available	ISO 10545-8
Thermal Shock Resistance	Test method available	Resistance	ISO 10545-9
Crazing Resistance	Required	Resistance	ISO 10545-11
Resistance to acids and alkalis	As indicated by the manufacturer	GLB	ISO 10545-13
Resistance to household chemicals and swimming pool salts	Min GB	Min GB	ISO 10545-13
Resistance to Staining	Min. Class 3	Min. Class 3	ISO 10545-14
Scratch Hardness	min 3 Mohs	min 4 Mohs	EN 101


Dust Pressed Ceramic Floor Tiles With Low Water Absorbtion

TECHNICAL CHARACTERISTIC	TS EN-14411 Annex H Group B1b VALUES	EGE SERAMİK VALUE	TEST STANDARD
Length and width	$\pm 0,5\%$	$\pm 0,4\%$	ISO 10545-2
Thickness	$S \leq 190 \pm 10$ $S > 190 \pm 5$	$\pm 5\%$	ISO 10545-2
Rectangularity	$\pm 0,60\%$	$\pm 0,30\%$	ISO 10545-2
Straightness of sides	$\pm 0,50\%$	$\pm 0,25\%$	ISO 10545-2
Center Curvature	$\pm 0,50\%$	$\pm 0,25\%$	ISO 10545-2
Edge Curvature	$\pm 0,50\%$	$\pm 0,20\%$	ISO 10545-2
Warpage	$\pm 0,50\%$	$\pm 0,15\%$	ISO 10545-2
Surface Quality	A minimum of 95 % of the tiles shall be free from visible defects that would impair the appearance of a major area of tiles		ISO 10545-2
Water Absorption	$0,5\% < E \leq 3\%$ Individual max %3,3	$0,5\% < E \leq 3\%$ Individual max %3,3	ISO 10545-3
Modulus of Rupture	min 30 N/mm ² Individual min 27 N/mm ²	min 30 N/mm ² Individual min 27 N/mm ²	ISO 10545-4
Breaking Strength	Thickness $\geq 7,5$ mm 1100 N Thickness $< 7,5$ mm 700 N	Thickness $\geq 7,5$ mm 1100 N Thickness $< 7,5$ mm 700 N	ISO 10545-4
Abrasion Resistance	As indicated by the manufacturer	Test value for each product	GLAZED ISO 10545-7
Coefficient of linear thermal expansion	Test method available	Test method available	ISO 10545-8
Thermal Shock Resistance	Test method available	Resistance	ISO 10545-9
Crazing Resistance	Required	Resistance	ISO 10545-11
Frost Resistance	Required	Resistant NO ALTERNATION WITH 100 CYCLES	ISO 10545-12
Resistance to acids and alkalis	As indicated by the manufacturer	GLB	ISO 10545-13
Resistance to household chemicals and swimming pool salts	Min GB	Min GB	ISO 10545-13
Resistance to Staining	Min. Class 3	Min. Class 3	ISO 10545-14
Scratch Hardness	min 5 Mohs	min 5 Mohs	EN 101
Coefficient of friction	As indicated by the manufacturer	Test value for each product	ASTM C 1028 96
Slippery Resistance	As indicated by the manufacturer	Test value for each product	DIN 51130

Dust Pressed Ceramic Porcelain Tiles With Low Water Absorbtion

TECHNICAL CHARACTERISTIC	TS EN-14411 Annex G Group BIa VALUES	EGE SERAMİK VALUE	TEST STANDARD
Length and width	190<S≤410 ± % 0,75 S>410 ± % 0,6	S≤410 ± % 0,3 S>410 ± % 0,2	ISO 10545-2
Thickness	S≤190 ± % 10 S>190 ± % 5	± 5 %	ISO 10545-2
Rectangularity	S≤90 ± % 1,0 S>90 ± % 0,6	S≤90 ± % 0,3 S>90 ± % 0,25	ISO 10545-2
Straightness of sides	S≤90 ± % 0,75 S>90 ± % 0,5	± 0,25 %	ISO 10545-2
Center Curvature	S≤90 ± % 1,0 S>90 ± % 0,5	± 0,25 %	ISO 10545-2
Edge Curvature	S≤90 ± % 1,0 S>90 ± % 0,5	± 0,20 %	ISO 10545-2
Warpage	S≤90 ± % 1,0 S>90 ± % 0,5	± 0,20 %	ISO 10545-2
Surface Quality	A minimum of 95 % of the tiles shall be free from visible defects that would impair the appearance of a major area of tiles		ISO 10545-2
Water Absorption	E ≤ 0,5 % Individual max % 0,6	E ≤ 0,5 % Individual max % 0,6	ISO 10545-3
Modulus of Rupture	min 35 N/mm2 Individual min 32 N/mm2	min 35 N/mm2 Individual min 32 N/mm2	ISO 10545-4
Breaking Strength	Thickness ≥ 7,5 mm 1300 N Thickness < 7,5 mm 700 N	Thickness ≥ 7,5 mm 1300 N Thickness < 7,5 mm 700 N	ISO 10545-4
Resistance to deep abrasion of unglazed tiles	As indicated by the manufacturer	Test value for each product	UNGLAZED ISO 10545-6
Resistance to surface abrasion of glazed tiles	As indicated by the manufacturer	Test value for each product	GLAZED ISO 10545-7
Coefficient of linear thermal expansion	Test method available	Test method available	ISO 10545-8
Thermal Shock Resistance	Test method available	Resistance	ISO 10545-9
Crazing Resistance	Required	Resistance	ISO 10545-11
Frost Resistance	Required	Resistant NO ALTERNATION WITH 100 CYCLES	ISO 10545-12
Resistance to acids and alkalis	As indicated by the manufacturer	Glazed tiles GLB Unglazed tiles ULB	ISO 10545-13
Resistance to household chemicals and swimming pool salts	Glazed tiles GB Unglazed tiles UB	Glazed tiles GB Unglazed tiles UB	ISO 10545-13
Resistance to Staining	Min. Class 3	Min. Class 3	ISO 10545-14
Scratch Hardness	min 5 Mohs	min 5 Mohs	EN 101
Coefficient of friction	As indicated by the manufacturer	Test value for each product	ASTM C 1028 96
Slippery Resistance	As indicated by the manufacturer	Test value for each product	DIN 51130

Packing Details



Tile Dimension (cm)	kg/pce	pcs/box	kg/box	box/plt	m²/box	m²/plt	Net kg/plt	Gross kg/plt	plt/ctn 20ft	kg/ctn 20ft	m²/ctn 20ft	En x Boy x Yükseklik (cm)
WALL TILE												
7.5 x 15 x 0.60	0,130	88	11,40	68	0,990	67,32	776	796	33	26.252	2.222	80 x 120 x 64 cm
7.5 x 15 x 0.60 (Metro)	0,130	44	5,72	170	0,500	85,00	972	992	22	21.833	1.870	80 x 120 x 98 cm
10 x 10 x 0.90 (Opulento)	0,156	25	3,89	264	0,250	66,00	1.027	1.047	22	23.033	1.452	80 x 120 x 76 cm
10 x 20 x 0.80	0,263	25	6,57	152	0,500	76,00	999	1.019	22	22.410	1.672	80 x 120 x 95 cm
10 x 33 x 0.80	0,465	15	6,98	120	0,500	60,00	837	857	28	23.996	1.680	80 x 120 x 76 cm
20 x 25 x 0.70	0,607	20	12,14	88	1,000	88,00	1.068	1.088	22	23.943	1.936	80 x 120 x 96 cm
25 x 33 x 0.75	1,113	18	20,03	54	1,500	81,00	1.082	1.102	22	24.240	1.782	80 x 120 x 91 cm
25 x 40 x 0.70 (thin)	1,311	17	22,29	54	1,700	91,80	1.223	1.243	20	24.470	1.836	85 x 125 x 91 cm
25 x 40 x 0.80	1,453	15	21,80	54	1,500	81,00	1.177	1.197	22	26.332	1.782	80 x 120 x 91 cm
20 x 50 x 0.80	1,487	10	14,87	54	1,000	54,00	803	823	31	25.512	1.674	80 x 120 x 76 cm
30 x 60 x 0.80 (thin)	2,570	9	23,13	40	1,620	64,80	925	945	27	25.520	1.750	85 x 125 x 76 cm
30 x 60 x 0.90	3,020	6	18,12	48	1,080	51,84	870	890	30	26.693	1.555	80 x 120 x 76 cm
30 x 60 x 1.00 (Precut)	3,385	6	20,31	40	1,080	43,20	812	832	30	24.972	1.296	80 x 120 x 76 cm
30 x 60 x 0.90 (Rect.)	2,860	6	17,16	40	1,080	43,20	686	706	33	23.311	1.426	80 x 120 x 76 cm
25 x 75 x 1.00	3,380	6	20,28	48	1,125	54,00	973	993	22	21.856	1.188	80 x 120 x 91 cm
25 x 75 x 1.00 (Rect.)	3,240	6	19,44	48	1,125	54,00	933	953	22	20.969	1.188	80 x 120 x 91 cm
33 x 99 x 1.20 (Rect.)	6,600	3	19,80	26	1,000	26,00	515	535	40	21.392	1.040	110 x 110 x 49 cm
33 x 99 x 1.20 (Rect.) Rölyef	6,600	3	19,80	24	1,000	24,00	475	495	40	19.808	960	110 x 110 x 49 cm
FLOOR TILE												
10 x 10 x 0.63	0,130	100	13,00	78	1,000	78,00	1.014	1.034	22	22.748	1.716	80 x 120 x 76 cm
10 x 10 x 0.63 (Dot Mounted)	1,560	12	18,72	54	1,440	77,76	1.011	1.031	22	22.679	1.711	80 x 120 x 76 cm
20 x 20 x 0.90	0,880	25	22,00	69	1,000	69,00	1.518	1.538	18	27.694	1.242	96 x 127 x 80 cm
30 x 60 x 1.20 Home Art	4,700	5	23,50	48	0,900	43,20	1.128	1.148	23	26.404	1.166	85 x 125 x 76 cm
33 x 33 x 0.80	1,955	9	17,60	62	1,000	62,00	1.091	1.111	22	24.440	1.364	80 x 120 x 82 cm
45 x 45 x 0.90	4,100	7	28,70	52	1,418	73,71	1.492	1.512	17	25.711	1.253	80 x 120 x 106 cm
60 x 60 x 1.00	8,104	4	32,76	32	1,440	46,08	1.048	1.068	25	26.708	1.152	80 x 120 x 76 cm
GLAZED PORCELAIN												
6 x 25 x 1.00	0,330	20	6,60	135	0,300	40,50	891	911	30	27.330	1.215	80 x 120 x 76 cm
10 x 20 x 0.67	0,294	25	7,35	144	0,500	72,00	1.058	1.078	25	26.960	1.800	80 x 120 x 76 cm
10 x 20 x 0.90	0,392	25	9,80	111	0,500	55,50	1.088	1.108	22	24.372	1.221	80 x 120 x 76 cm
12 x 60 x 1.00 (Rect.) Manuel	1,620	10	16,20	60	0,720	43,20	972	992	26	25.792	1.123	80 x 120 x 76 cm
15 x 60 x 1.05	2,020	11	22,22	40	1,000	40,00	889	909	28	25.446	1.120	80 x 120 x 76 cm
15 x 90 x 1.00	3,020	9	27,18	48	1,215	58,32	1.305	1.325	20	26.493	1.166	127 x 96 x 76 cm
20 x 120 x 1.10	5,825	5	29,13	32	1,200	38,40	932	952	27	25.704	1.037	127 x 96 x 55 cm
20 x 120 x 1.10 (Rect.) Manuel	5,720	4	22,88	42	0,960	40,32	961	981	26	25.505	1.048	91 x 129 x 77 cm
20 x 20 x 1.00	0,918	18	16,52	72	0,720	51,84	1.190	1.210	22	26.614	1.140	80 x 120 x 76 cm
20 x 20 x 1.40	1,253	12	15,03	72	0,480	34,56	1.082	1.102	24	26.458	829	80 x 120 x 76 cm
30 x 30 x 1.00 (Rect.) Color Body	1,950	9	17,55	64	0,810	51,84	1.123	1.143	24	27.437	1.244	85 x 125 x 76 cm
30 x 60 x 1.00	4,020	6	24,12	40	1,080	43,20	965	985	25	24.620	1.080	80 x 120 x 76 cm
30 x 60 x 1.00 (Rect.)	3,750	6	22,50	40	1,080	43,20	900	920	24	22.080	1.037	80 x 120 x 76 cm
30 x 60 x 1.00 (Rect.) Color Body	4,140	6	24,84	40	1,080	43,20	994	1.014	25	25.340	1.080	85 x 125 x 76 cm
28.6 x 58 x 1.00 (Rect./Polished)	3,750	6	22,50	40	1,000	40,00	900	920	27	24.840	1.080	80 x 120 x 76 cm
33 x 33 x 0.80 (Standard)	1,977	9	17,79	62	1,000	62,00	1.103	1.123	19	21.340	1.178	80 x 120 x 81 cm
33 x 33 x 0.90 (Private)	2,138	9	19,24	62	1,000	62,00	1.193	1.213	20	24.260	1.240	80 x 120 x 81 cm
45 x 45 x 0.90 (Standard)	4,100	7	28,70	52	1,418	73,71	1.492	1.512	17	25.711	1.253	80 x 120 x 106 cm
43 x 43 x 1.00 (Rect./Polished)	4,181	6	25,09	52	1,110	57,72	1.304	1.324	20	26.489	1.154	80 x 120 x 102 cm
44.9 x 44.9 x 0.90 (Rect.)	4,050	6	24,30	52	1,210	62,92	1.264	1.284	19	24.388	1.195	80 x 120 x 102 cm
45 x 90 x 1.00	9,240	3	27,72	32	1,215	38,88	887	907	28	25.397	1.089	127 x 96 x 60 cm
45 x 90 x 1.00 (Rect./Lappato)	8,600	3	25,80	32	1,215	38,88	826	846	29	24.522	1.128	127 x 96 x 60 cm
45 x 90 x 1.00 (Rect.) Color Body	8,600	3	25,80	32	1,215	38,88	826	846	29	24.522	1.128	127 x 96 x 60 cm
43 x 88 x 1.00 (Rect./Polished)	8,600	3	25,80	32	1,140	36,48	826	846	30	25.368	1.094	127 x 96 x 60 cm
60 x 60 x 1.00	8,000	4	32,00	32	1,440	46,08	1.024	1.044	25	26.100	1.152	80 x 120 x 76 cm
60 x 60 x 1.00 (Rect./Lappato)	8,320	4	33,28	32	1,440	46,08	1.065	1.085	25	27.124	1.152	80 x 120 x 76 cm
60 x 60 x 1.00 (Rect.) Color Body	8,360	4	33,44	32	1,440	46,08	1.070	1.090	23	25.072	1.060	85 x 125 x 76 cm
58 x 58 x 1.00 (Rect./Polished)	7,650	4	30,60	32	1,350	43,20	979	999	26	25.979	1.123	80 x 120 x 76 cm
80 x 80 x 1.10	15,680	2	31,36	40	1,280	51,20	1.254	1.274	20	25.488	1.024	87 x 120 x 96 cm
80 x 80 x 1.10 (Rect./Lappato)	14,750	2	29,50	40	1,280	51,20	1.180	1.200	20	24.000	1.024	87 x 120 x 96 cm
78 x 78 x 1.10 (Rect./Polished)	14,750	2	29,50	40	1,220	48,80	1.180	1.200	20	24.000	976	87 x 120 x 96 cm
60 x 120 x 1.10 (Rect./Lappato)	17,900	2	35,80	32	1,440	46,08	1.146	1.166	22	25.643	1.014	127 x 96 x 76 cm
60 x 120 x 1.10 (Rect.) Color Bod	17,600	2	35,20	32	1,440	46,08	1.126	1.146	22	25.221	1.014	127 x 96 x 76 cm
58 x 118 x 1.10 (Rect./Polished)	17,000	2	34,00	32	1,370	43,84	1.088	1.108	23	25.484	1.008	127 x 96 x 76 cm

Note: quantities under "pli/ctn 20ft." have been calculated and indicated according to the upper limit for 20' container, 26,500 kg.

Interlocking Tiles Packing Details

													
Tile Dimension (cm)	kg/pce	pcs/box	kg/box	box/plt	m²/box	m²/plt	Net kg/plt	Gross kg/plt	plt/ctn 20ft	kg/ctn 20ft.	m²/ctn 20ft.	En x Boy x Yükseklik (cm)	
SPECIAL SHAPED DIGITAL TILE PRODUCTS													
Automatic Packaging													
15 x 40 x 0.90 (AVILA)	1,140	20	22,80	50	1,14	57,00	1.140	1.168	20	23.360	1.140	85 x 125 x 100 cm	
15 x 40 x 0.90 (CRONOS/VENTO)	1,020	20	20,40	50	1,05	52,50	1,020	1,048	22	23,056	1.155	80 x 120 x 100 cm	
30 x 60 x 0.90 (INFINITY/ATLAS)	3,750	6	22,50	36	0,97	34,92	810	838	30	25,140	1,048	80 x 120 x 76 cm	
45 x 45 x 0.90 (RIVA / RODOS)	3,404	9	30,64	48	1,25	60,00	1,471	1,499	17	25,475	1,020	110 x 110 x 110 cm	
45 x 45 x 0.90 (VIA APPIA)	2,750	9	24,75	48	1,30	62,40	1,188	1,216	20	24,320	1,248	110 x 110 x 110 cm	
45 x 45 x 0.90 (TROY)	3,480	9	31,32	48	1,50	72,00	1,503	1,531	17	26,033	1,224	110 x 110 x 110 cm	
42 x 44 x 0.90 (RIVA)	3,550	9	31,95	48	1,34	64,32	1,534	1,554	17	26,411	1,093	110 x 110 x 110 cm	

NOTE: * quantities under "plt/ctn 20ft." have been calculated and indicated according to the upper limit for 20' container, 26.500 kg.*

Contact



Export Sales Companies Contact Information

Ege Seramik İç ve Dış Ticaret A.Ş. (Foreign Trade)

Büyükdere Cad. Polat Han No:87/3 Mecidiyeköy 34387 İstanbul / TÜRKİYE

Tel : +90 (212) 216 67 00 Fax: + 90 (212) 211 98 83 e-mail: esdt@polatholding.com

Ege Seramik America Inc.

1721 OAKBROOK DRIVE, SUITE C NORCROSS, GA 30093 USA

Tel : + 1 (678) 291 08 88 Fax : + 1 (678) 291 08 32 www.egeseramik-usa.com

Factory Contact Information

Ege Seramik Sanayi ve Ticaret A.Ş.

Kemalpaşa OSB Anırsızca Sanayi Sitesi Sokak Dış Kapı No: 297 İç Kapı No: 1 Kemalpaşa - İzmir / TÜRKİYE

Tel: +90 (232) 878 17 00 Fax: +90 (232) 878 12 54 Web: www.egeseramik.com

Ege Seramik AŞ. Regional Managers

İSTANBUL 1. Regional Manager	0 532 373 38 05	İSTANBUL European Side
İSTANBUL 2. Regional Manager	0 532 373 38 03	İSTANBUL European Side
İSTANBUL 3. Regional Manager	0 530 333 93 54	ADAPAZARI, DÜZCE, BOLU, KARABUK, ZONGULDAK, BARTIN, KOCAELİ
İSTANBUL 4. Regional Manager	0 530 549 34 95	İSTANBUL European Side
TRAKYA Regional Manager	0 505 178 68 85	KIRKLARELİ, TEKİRDAĞ, EDİRNE
BURSA Regional Manager	0 532 373 38 04	ÇANAKKALE, BURSA, BALIKESİR, KÜTAHYA, BİLECİK, ESKİŞEHİR, YALOVA
İZMİR Regional Manager	0 532 373 38 12	İZMİR, AYVALIK, KUŞADASI, DİDİM
GÜNEY Regional Manager	0 532 373 38 09	DENİZLİ, AYDIN, MUĞLA, MANİSA, UŞAK
ANKARA. Regional Manager	0 532 373 38 17	ANKARA, KIRIKKALE, ÇANKIRI, KASTAMONU, VAN
ANTALYA Regional Manager	0 532 373 38 36	ANTALYA, BURDUR, ISPARTA, KONYA, KARAMAN, FETHİYE, AFYONKARAHİSAR
KAYSERİ Regional Manager	0 532 373 38 13	KAYSERİ, SİVAS, NEVŞEHİR, YOZGAT, AKSARAY, NİĞDE, KIRŞEHİR
ADANA Regional Manager	0 532 373 38 14	ADANA, İÇEL, KAHRAMANMARAŞ, OSMANİYE, HATAY, KİLİS, GAZİANTEP
DİYARBAKIR Regional Manager	0 532 373 38 16	ŞANLIURFA, ADIYAMAN, MALATYA, ELAZIĞ, DİYARBAKIR, MARDİN, BATMAN, SİİRT, ŞIRNAK, HAKKARİ
TRABZON - ERZURUM - SAMSUN Regional Manager	0 530 878 73 42	GİRESUN, TRABZON, GÜMÜŞHANE, BAYBURT, ERZİNCAN, RİZE, ERZURUM, ARTVİN, ARDAHAN, KARS, IĞDIR, TUNCELİ, BİNGÖL, BİTLİS, AĞRI, MUŞ, ORDU, SİNOP, ÇORUM, AMASYA, SAMSUN, TOKAT
DIY Stores Sales Supervisor	0 532 373 38 08	TURKEY
Wholesale Responsibilities	0 505 178 68 76	MARMARA REGION